


- Ultra-Web® nanofiber media ensures longer filter life at a significantly lower pressure drop
- Surface filtration offers superior particle release
- Fluted construction packages more effective filter area in a smaller space
- Filter pack is designed with easy-grip handles.
- Easy filter changeout for quick maintenance – no tools required
- MERV* 15 filtration efficiency rating per ASHRAE 52.2-2007

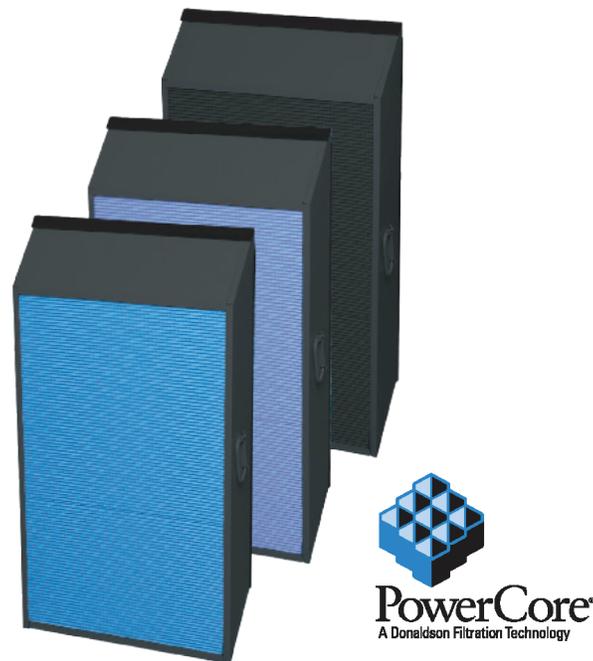

PowerCore® V-Series Filter Packs

(Also available in Flame-Retardant, Spunbond and Anti-Static)

PROVEN TECHNOLOGY THAT PERFORMS


Proven and proprietary Ultra-Web® filter media delivers longer filter life, cleaner air and greater cost savings than other traditional filter media. It is made with an electrospinning process that produces a very fine, continuous, resilient fiber of 0.2-0.3 microns in diameter.

PowerCore filter packs with Ultra-Web media keep dust on the surface of the fluted channels where it is easily cleaned off unlike conventional filter media that depth loads.


- Surface loading promotes improved filter cleaning and longer life
- Improved pulse cleaning lowers operational pressure drop and energy use

SEM† IMAGES

1 micron = 1/25,400 of an inch (1/1,000 millimeters)

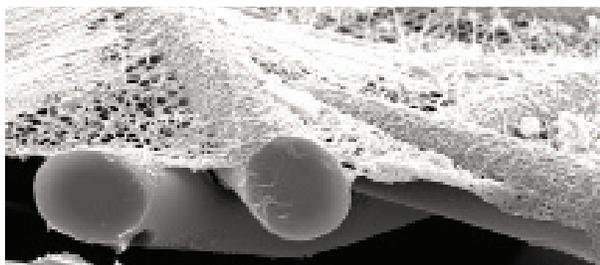

Clean Ultra-Web Media

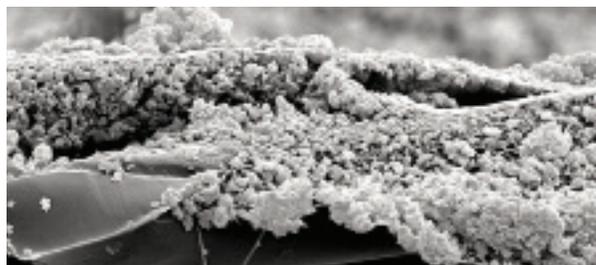

Surface-Loaded Ultra-Web Media
(substrate still clean)

† Scanning Electron Microscope

* Refer to Technical Information on page 2.

APPLICATIONS

- Premium performance on fine, dry, fibrous and/or abrasive dust
- Flame retardant version available
- Optional anti-static (AS) media available for applications where electrostatic charges can be hazardous
- Optional Spunbond media available for high humidity applications

| MEDIA COMPATIBILITY DATA | | |
|------------------------------------|--|--------------------------------|
| Temperature Resistance | 150°F 65°C | |
| Moisture Absorption** | Maximum 14% @ 70°F (21°C) and 65% RH | |
| Chemical Tolerance*** | Acids→Poor Bases→Fair | Oxidants→Poor Solvents→Fair |
| Moisture Absorption** for Spunbond | 0.2-0.5% @ 70°F (21°) and 65% RH | |
| Chemical Tolerance*** for Spunbond | Acids→Good Bases→Good | Oxidants→Good Solvents→Good |
| Abrasion Resistance | Excellent per TAPPI 476 (Taber Method) | |

SPECIFICATIONS

| MEDIA COMPOSITION | |
|----------------------|--|
| Nanofiber Technology | Durable proprietary synthetic filter media fiber and polymer Mean fiber diameter of 0.2 µm |
| Substrates | <ul style="list-style-type: none"> • Proprietary blend of cellulose fibers • Flame-retardant version per UL[†] Standard 558, TAPPI Standard T 461 om-94, and DIN 53438 Part 3 • Anti-static version per ESD STM 11.11-2001 Resistance less than 10⁸ OHM • Spunbond Polyester |

| MEDIA EFFICIENCY | |
|------------------------|-------------------------------|
| U.S. Efficiency Rating | MERV* 15 per ASHRAE 52.2-2007 |

| FILTER PACK CONSTRUCTION | |
|--------------------------|--|
| Standard Construction | Rectangle design Metal casing Fluted media configuration Urethane gasket Built-in handle |

CURRENT AVAILABLE CONFIGURATIONS

| Collector Models | Dimensions | | PowerCore | | | |
|------------------|-------------------|-----------------|-----------|-----------------|-------------|----------|
| | in | mm | Standard | Flame Retardant | Anti-Static | Spunbond |
| VH | 36.3 x 22.4 x 5.3 | 922 x 569 x 135 | • | • | • | • |
| VL | 36.3 x 22.4 x 5.3 | 922 x 569 x 135 | • | • | • | • |

† UL is a registered trademark of Underwriters Laboratories, Inc.

* The Minimum Efficiency Reporting Value (MERV) of this filter cartridge has been determined through independent laboratory testing using ASHRAE 52.2 (2007) test standards. The MERV rating was determined at a face velocity of 118 feet per minute (36.0 meters per minute) and loading up to four inches (101.6 millimeters) water gauge. Actual efficiency of any filter cartridge will vary according to the specific application parameters. Dust concentration, airflow, particle characteristics, and pulse cleaning methods all affect filtration efficiency.

** Environmental conditions involving combinations of high temperature, corrosive material, and moisture can reduce media strength. Reduction in media strength may compromise cartridge integrity and performance.

*** A combination of chemicals may alter fiber resistance to the specified performance level. Chemical attack may compromise cartridge integrity and performance.

Significantly improve the performance of your collector with genuine Donaldson Torit replacement filters and parts. **Call Donaldson Torit today 800-365-1331.**



Tel 800-365-1331 (USA)
 Tel 800-343-3639 (within Mexico)
 donaldsontorit@donaldson.com
 donaldsontorit.com
 Donaldson Company, Inc.
 Torit
 P.O. Box 1299
 Minneapolis, MN
 55440-1299 U.S.A.

EXACTLY WHAT YOU NEED.™
 Powercore VH Filter Pack (04/14)
 © 2011 Donaldson Co., Inc. All Rights Reserved. All products, product specifications, and data (airflow, capacity, dimensions, or availability) are subject to change without notice, and may vary by region or country. Donaldson Torit, Torit PowerCore, Ultra-Web, and the color blue are registered trademarks of Donaldson Company, Inc. Contains Donaldson proprietary technology.